




# elektrosistem



## PR/1B and PE/2 CONTROL FOOT PEDALS MOD. PR / PE

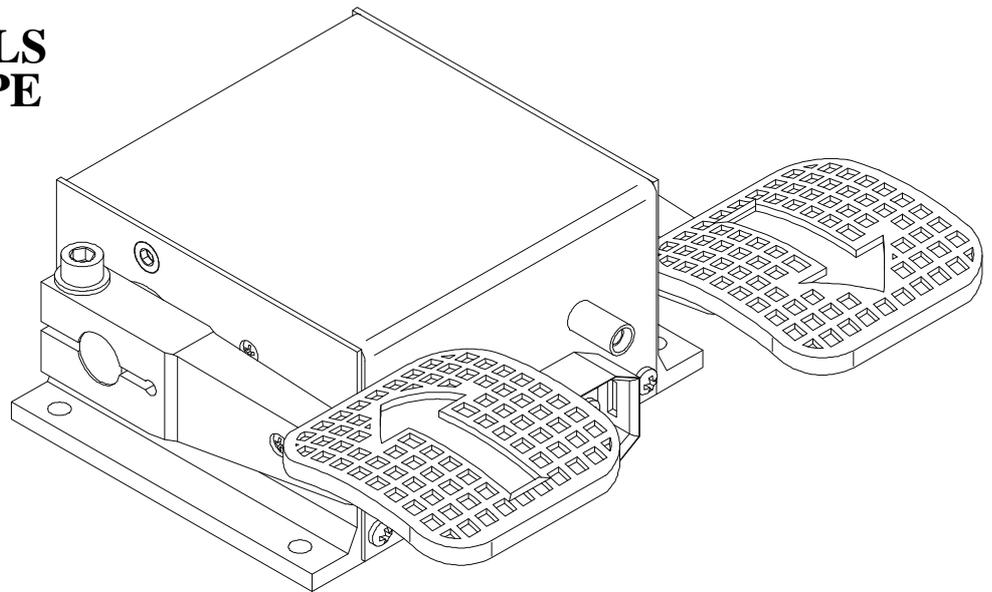

PR/1B and PE/2 foot pedals comply with all requirements concerning use in lift trucks and electric vehicles thanks to their compact size, simple assembling and electric connection through connector.

Externally made of aluminium profile foot pedals guarantee high efficiency and long life, even when used in environments with a high degree of humidity and subjected to continuous climate changes.

The precision assembly carried out on ground shaft guarantees the lowest mechanical wear and the absence of clearances.

Running and by-pass consents through cam controlled microswitches and speed regulation through 5 Kohm potentiometer make foot pedals a reliable and strong product.

Foot pedals can be supplied with a bored lever to be used as actuators of systems already present on the machine.

PE/2 foot pedal is equipped with two pedals while PR/1B has one left or right side pedal according to the application requirements and must be applied together with a running direction selector fitted on the panel or on the steering wheel.

### PR/1B production range

**PR/1B** - Running and by-pass consents.

**PR/1BR** - As in PR/1B, with braking at running pedal release. Special model to be used with PULSAR R controller.


### PE/2 production range

**PE/2** - Forward, reverse and second speed consents.

**PE/2R** - As in PE/2, with braking at running pedal release. Special model to be used with PULSAR R controller.




**PEDAL DIMENSIONS**

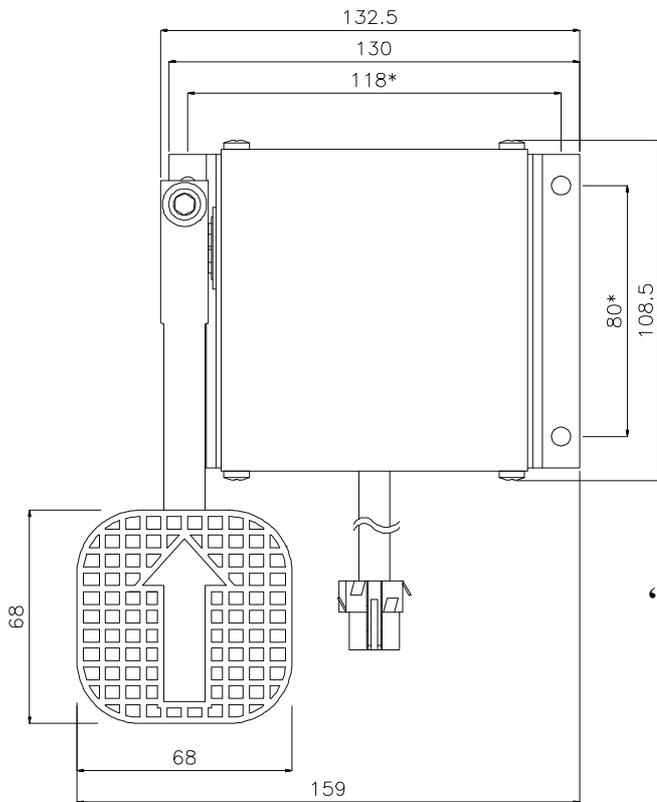

**“PR/1B”**

\* n°4 holes Ø5,5 for fastening  
N.B. All dimensions are in mm.

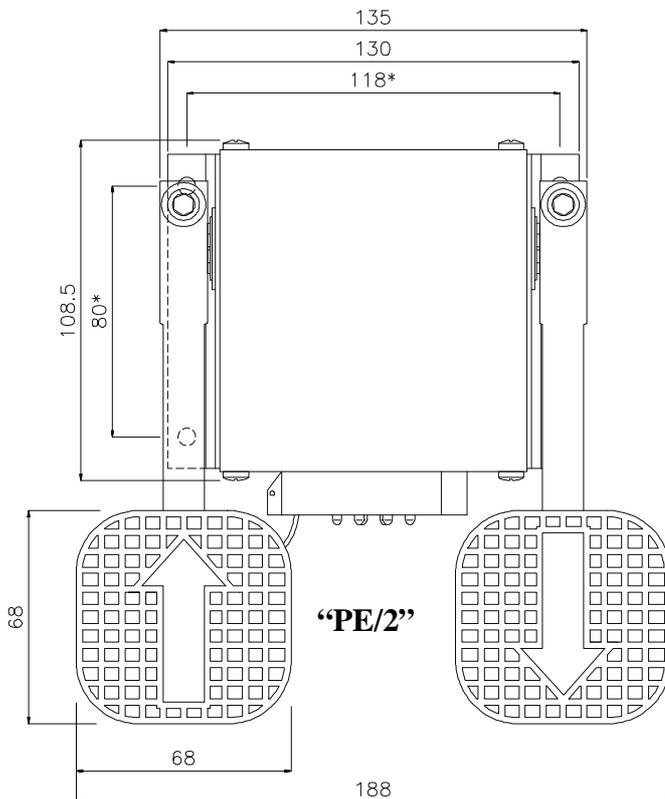

**“PE/2”**

\* n°4 holes Ø5,5 for fastening  
N.B. All dimensions are in mm.